

# 2942: Thermal camera THERMO VISIOVAL®

## The + product :



**Fast, accurate diagnostics:** high-resolution 256 x 192 pixel thermal sensor.

**Detailed view:** 3.5" 320 x 240 pixel screen.

**Detection of the smallest temperature variations:** high thermal sensitivity.


## Description

### Thermal sensor:

**Measure** malfunctions **with an accuracy of  $\pm 2^{\circ}\text{C}$  or  $\pm 2\%$**  thanks to **the high-resolution infrared thermal sensor** (256 x 192 pixels), with a temperature range from  **$-10^{\circ}\text{C}$  to  $400^{\circ}\text{C}$** .

**Visualize the details** of your thermal images on **the 3.5" widescreen display** with **320 x 240 pixel** resolution.

**Quickly scan** large areas with **the  $50^{\circ} \times 37^{\circ}$  wide-angle lens**.

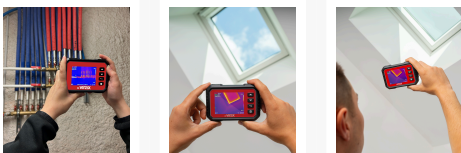

### Features / settings :

**Easily differentiate** temperature differences according to the environment, thanks to **5 color palettes**.

**Locate and compare** maximum, minimum and central temperatures simultaneously with **the pointer display**.

**Navigate** the screen **intuitively** thanks to **black, non-slip Soft Touch buttons** for use even with wet hands.

**IP 54 protection** for indoor and outdoor use; **shock-resistant** thanks to **Soft Touch protective shell**.

**Photo recording**, with transfer via USB-C cable (included) or 4 GB micro-SD card (included).

Up to **4 hours' autonomy** thanks to its **3.7 V Li-ion battery**; **2-hour** recharge time via USB-C cable (included).

**Compact** (designed to fit in a pocket) and **lightweight** (only 210g).

More Information

Supplied with	USB-C cable → for universal connectivity 4GB micro-SD card → for a capacity of +17,000 photos Textile cover → for easy transport
---------------	--

References

Sku	Description	Size mm	kg
294205	Thermal camera THERMO VISIOVAL®	130 x 30 x 90	0,210

