

Reciprocating SAW

Powerful and versatile

The Virax reciprocating saw is the ideal tool for all intensive or occasional cutting tasks.

Cutting capacities:

Steel pipe: up to 6" (168.3 mm)

Steel sections, nail-embedded wood, pallets: up to 250 mm

Steel sheet: up to 6.3 mm thick



2" Clamping vice for a perpendicular cut

1300 W rated power for reliability

Replaceable carbon brushes

Ergonomic rubberised casing for maximum safety and optimum grip

Ergonomic non-slip handle for a secure grip when cutting

Orbital movement for better removal of shavings and a faster cut

Fixed shoe for stability during freehand cutting

Universal 12.7 and 20 mm blade holder with secure fastening screw

Safety switch to avoid accidental operation

Electronic control:

- Soft starting for better tube cutting action;
- Electrical overload protection (current and temperature);
- Constant electronic system ensures constant speed under varying load.

Specifications:

Ref: 045001
Weight: 4.2 kg
Rated power: 1300 W
Speed: 2200 cuts per minute
Stroke: 30 mm
Dimensions: 520 x 100 x 100 mm

Kit includes:


Reciprocating Saw
Plastic Case
2" clamping vice
Hexagonal Wrench

 **virax**



HSS bi-metal Reciprocating saw blade:

- The bi-metal saw blade is virtually unbreakable.
- High speed steel teeth can perform even the most difficult cuts, as well as mitre cuts.
- Sawing direction is marked on the blade.
- Seven sizes for all possible applications.
- Sold in packs of 5 blades.

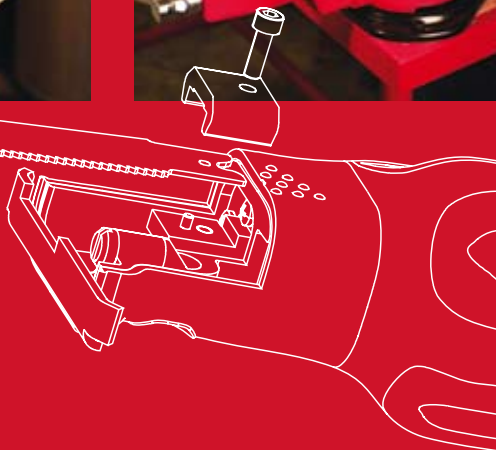

APPLICATION	Length x width x thickness (mm)	Length x width x thickness (inch)	Number of teeth per inch	Number of teeth per cm	Pitch mm	Kg	REF
«UNIVERSAL» BLADE							
Wood, nail-embedded wood, plastic, plasterboard, cellular concrete, ferrous and non-ferrous metal, cast iron	150 x 19 x 1,3	6 x 3/4 x 0,050	8 - 12	3 - 5	3,1 - 2,1	0,124	046002*
Wood, nail-embedded wood, plastic, plasterboard, cast iron, ferrous and non-ferrous metal	200 x 19 x 1,3	8 x 3/4 x 0,050	8 and 12	3 and 5	3,1 - 2,1	0,185	046011*
«METAL» BLADE							
Thick metal (4.8 to 6.3 mm thick), hard rubber, glass fibre, pipes, angle sections	150 x 19 x 0,9	6 x 3/4 x 0,035	14	6	1,8	0,092	046004*
Metal (3 to 4.8 mm thick), pipes, angle sections, pallet renovation	150 x 19 x 0,9	6 x 3/4 x 0,035	18	7	1,4	0,092	046005*
«WOOD» BLADE							
Difficult tasks involving nail-embedded wood, fast cutting, used for renovation and demolition	150 x 19 x 1,3	6 x 3/8 x 0,050	5 - 8	2 - 3	5 - 3,1	0,092	046006*
Very fast cutting of wood and nail-embedded wood	230 x 19 x 1,3	9 x 3/4 x 0,050	6	3	4,2	0,165	046012*
«DEMOLITION» BLADE							
Ideal for demolition, plumbing, cutting metal, wood, nail-embedded wood, steel pipe up to Ø 4"	200 x 25 x 1,6	8 x 1 x 0,063	8	3	3,1	0,308	046010**

12.7 mm shank ** 20 mm shank.

virax

Makes the most of your talent

39, quai de Marne - BP 197 - F 51206 Epervain Cedex
www.virax.com

Service client France - Tel.: +33 (0)3 26 59 56 78 - Fax: +33 (0)3 26 59 56 20 - client.fr@virax.com
 International Customer Service - Tel.: +33 (0)3 26 59 56 97 - Fax: +33 (0)3 26 59 56 70 - export@virax.com